


- **4,000 Pounds Carrying Capacity**
- **Wireless or Wire guidance**
- **RF Communication**
- **Automatic or Manual Operation**

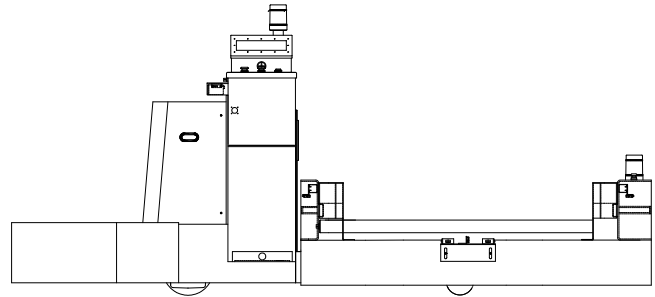

Savant Automation's DL-40 Automatic Guided Vehicle is a low profile unit load transporter. This design incorporates the latest technologies and features that customers have indicated are important for automated material handling systems. The load deck can be configured with various mechanisms to adapt to most any application, including unit load roller conveyor, chain conveyor, extractor mechanism, parasitic drive, and powered lift/lower deck.

The DL-40 can be applied in virtually any industry application. A DL-40 can be used for material movement between work cells, from palletizing to stretch wrapping, from packaging to shipping, from receiving to storage, and as a material transfer device at the front end of an automated storage system. It can transport racks, pallets, roll stock, crates, totes, and bulk hoppers or containers. This AGV can safely travel in high traffic areas, in narrow causeways, and easily interface with automated systems requiring transfer heights as low as 15 inches from the floor.

The DL-40 is available with the state of the art Savant Automation Virtual Path™ Guidance using an onboard gyroscope to determine AGV headings and positional information. The onboard computer controls navigation, communication, and safety systems.

The DL-40 is also available with Savant Automation's revolutionary Q-CAN™ system controls. Q-CAN (Quick Configurable AutomatiN) utilizes a standard program that permits quick, easy system design, and allows users to make changes to their own AGV systems.

Standard Features

- Fully automated operation
- Automatic load/unload transfer
- Onboard routing and traffic control logic
- Automatic return to battery change area upon sensing low battery
- Onboard diagnostic mode for fast, easy troubleshooting

- Controls mounted to allow easy accessibility
- Remove/Enter on path anywhere without resetting system controls
- Pendant control for off-path manual operation
- Rugged steel frame construction for industrial environments
- 100% gear driven transmission (no belts)

Warning and Safety Devices

- Front poly-carbonate plastic bumper
- Emergency stop buttons
- Normal stop buttons
- Audio beeper while AGV is in motion
- Start signaling horn
- Flashing warning lights while in motion
- Dual-range object detection system

Display/Control Panel Features

- Touch sensitive keypad with sealed keys
- Easy to read, durable, 40 char by 2 line display
- Status, prompts and error messages displayed
- Operators are prompted for input, decreasing operator interface time
- Displays AGV's current status (on path/off path, low battery, etc.)
- Invalid entry notification eliminates input errors
- Easy to customize for special applications
- Over 100 English text display messages



Options

- Q-CAN™ System Controls
- Q-CAN™ Designer PC Program
- Remote vehicle management and dispatching
- Automatic charging
- Turn signals
- Programmable laser scanning safety bumper
- Ramp capability



616.791.8540
www.agvsystems.com

Model DL-40 Automatic Guided Vehicle

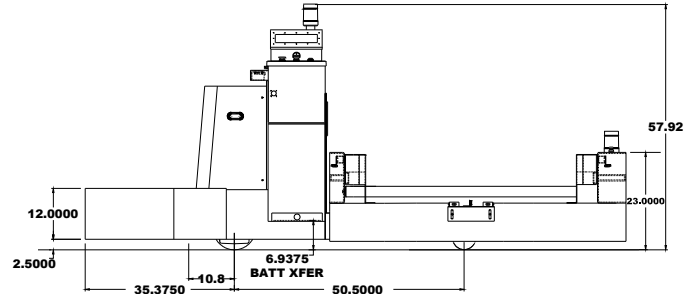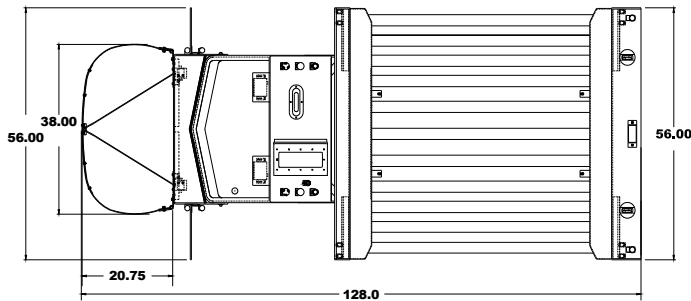

Mechanical Specifications

Carrying Capacity: 4,000 lbs. (1,818 Kg) rolling load (Carrying capacity on level grade with 2% coefficient of friction trailers)

Ramp: Up to 2% without de-rating capacity (ramps exceeding 3% require special evaluation)

Drive Configuration: Motor, transmission, drive wheel in vertical column

Drive Motor: 3 KW, 2.5 HP, series wound

Steer Configuration: Single front wheel steer

Drive Wheel: 10" (260mm) diameter x 4" (102mm) wide rubber

Load Wheels: 6" (152mm) diameter x 2.25" (57mm) wide polyurethane

Brakes: Electric, fail-safe

Frame: 3/8" laser cut steel plate

Battery Compartment: 31.5" (800mm) L x 13.75" (349mm) W x 27.75" (705mm) H with roller conveyor access, 6.75" (171.5mm) top-of-roller

Vehicle Weight: 3,500 lbs. (1,591 Kg) with battery

Speed in Automatic: 200 fpm (61mpm, 2.3 mph.), 16 speed ranges

Manual Operation: Operator onboard compartment with joystick control, electric steering and braking

Keyswitch: Automatic, Manual, Off

Turning Radius: 6 feet (1.829m) minimum at rated load

Control Specifications

Controls: Single board computer, CAN bus

Electrical System: 24-volt power

Navigation System: Virtual wireless navigation (inertial) or wire-based guidance

Communications: Via Radio Frequency (RF)

Routing & Traffic: Onboard control logic

Battery System: Heavy-duty industrial grade battery with discharge meter

Position Accuracy: $\pm 1"$ (25.4mm) stopping, $\pm 1"$ (25.4mm) side to side

Battery Information

Battery AH: 600 AH (maximum) flooded cell, 630 AH sealed (maintenance free)

Battery Weight: Flooded - 1,225 lbs. (557 Kg) Sealed - 1,250 lbs. (568 Kg)

Battery cycle: 8 hours minimum, based on standard duty cycle of 20% idle, 40% in motion full speed loaded, 40% in motion full speed unloaded

Charging Method: Manual battery exchange standard (or optional automatic charging)

NOTE: Specifications are subject to change without notice based on product improvements or technical requirements.
